Brickcom

3 Megapixel Fixed Box Network Camera

FB-300A Series

- 3 MP, Full HD (1080p), HD (720p) Resolution
- H.264, MPEG-4 and MJPEG Triple Codec Compression
- Simultaneous Dual stream for Optimized Quality and Bandwidth
- Unique Profile Setting for Variable Environment
- 802.3af Compliant PoE
- Built-in SD/SDHC Memory Card Slot for Local Storage
- Removable IR-Cut Filter for Day and Night Function
- IEEE 802.11 a/b/g/n Compliance Wireless Connectivity (*)
- WPS Function Support for Easy Wireless Network Setup (*)

Dimension Diagram (FB-300Ap Series)
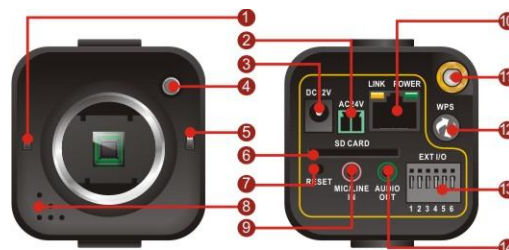
1. Status LED
2. Power Connector (AC24V in) (*)
3. Power Connector (DC12V in)
4. Light Sensor
5. WPS LED
6. SD/SDHC Card Slot (*)
7. Reset Button
8. Built-in Microphone
9. Microphone/Line In
10. Ethernet RJ45 10/100 Socket (Link/Power LED embedded)
11. Detachable Antenna (*)
12. WPS Button (*)
13. Extension I/O Terminal Block
14. Audio Out
15. Auto Iris Connector
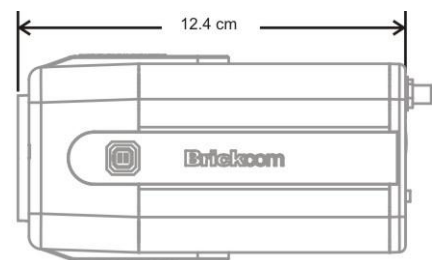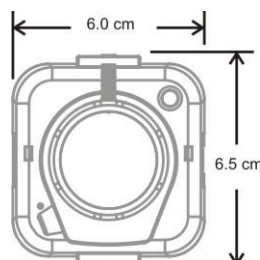
Camera Accessories

YV10x5HR4A-SA2
2.1x Vari-focal Lens with DC Iris

EN-2070
Infrared Illuminator Enclosure

EN-1000
Outdoor Enclosure

Network Equipments

PS-588I
8-port 10/100M POE Switch

PS-7242IL-AF
24-port 10/100M POE Switch

DWRT-600N
Dual-Band Wireless N Router

3001
PoE Injector

FB-300A Series

Camera

Model Number	**FB-300A** 3 MEGAPIXEL/ 2 Way Audio/ SDHC/ Ethernet/ POE/ RS485/ DIDO **WFB-300A** 3 MEGAPIXEL/ 2 Way Audio/ SDHC/ Ethernet/ POE/ RS485/ DIDO/ Wireless 802.11 abgn/ WPS button
Hardware System	CPU: 500 MHz Flash: 16M RAM: 128M DDR
Image Sensor	Sensor Type : 1/4" CMOS 3 megapixel Sensor Sensor Resolution : 2032 x 1536 pixel Minimum Illumination : 1 Lux (Without IR LED)
Day & Night Support	Mechanical ICR , triggered by sensor

Video

Video Image Compression	H.264 / MPEG4 / MJPEG
Video Setting	Auto Exposure Control: Sport, Normal, Night Vision, User Defined Auto Gain Control: 1X~5X Shutter Speed: 1/10000~1/7s
Image Resolution	**4:3** - 2032 x 1536 - 1600 x 1200 - 640 x 480 - 320 x 240 **5:4** - 1280 x 1024 - 640 x 512 - 320 x 256 **16:9** - 1280 x 720 - 640 x 352 - 320 x 176
Frame Rate at Max. Resolution	H.264: 8 fps MPEG4: 8 fps MJPEG: 6 fps

Audio

Audio Streaming	Two-way audio support
Audio Compression	G.711, AMR (8 kHz, Mono, PCM)
Audio Input	External microphone or line input (Unbalanced, 1.4 Vp-p, 1 Vrms)
Audio output	Line Output

Network

Communication	Ethernet : one 10/100Mbps RJ-45 IEEE 802.11a/b/g/n compliance **(WFB-300A)** Supported Protocols : TCP/IP, UDP, ICMP, DHCP, NTP, DNS, DDNS, SMTP, FTP, HTTP, Samba, PPPoE, UPnP, RTP, RTSP, RTCP, Wireless 802.11 a/b/g/n **(WFB-300A)**

General

Interface & Buttons	DC 12V Power In AC 24V Power In RJ45 Ethernet Cable Connector General I/O Terminal Block(DI/DO, RS485 included) External MIC/Line Input External Audio Output Built-in MIC Reset Button SD/SDHC memory card slot WPS Button (**WFB-300A**) Detachable Antenna Connector (**WFB-300A**)
Power input	AC 24V DC 12V / 1A (Power Supply) PoE:802.3af Compliant
LEDs	**FB-300A** Status/Ethernet(Power/Link) **WFB-300A** Status/WPS/Ethernet(Power/Link)
Power consumption	Max Power Consumption : 10 watts
Environment	Operating Temperature : 0°C ~ 50°C (32°F ~122°F) Operating Humidity : 10% ~ 80%
Dimension	124(L) * 60 (W) * 65(H) mm
Weight	**FB-300A** Net: 380g (Without Lens) Gross : 893G **WFB-300A** Net: 385g (Without Lens) Gross: 903G
Certification	FCC, CE
Warranty	Limited 2-year warranty

Brickcom Corporation Headquarters
Address: No.1 Jen Ai Rd, Hsinchu Industrial Park, Hukou, Hsinchu, Taiwan, R.O.C. 303 Tel: + 886-3-5982022 Fax: + 886-3-5982023
Mail: info@brickcom.com http://www.brickcom.com

(*) These are optional features. Please refer to the Buying Guide for the full list of optional features available for this product.